

GLOXER C1E PLASTER

DECLARATION OF PERFORMANCE

In accordance with European Construction Product Regulation (RPC) nº 305/2011

Nº DdP ES-TC0013

- 1. Unique identification code of the product-type:*

GLOXER C1E PLASTER
- 2. Type, batch or serial number or any element allowing identification of construction product as required pursuant to Article 11 (4):*

Cementitious Adhesive. Type C1E (UNE EN 12004:2008). Check the name, batch and date of manufacture on the packaging.
- 3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:*

For laying ceramic tiles and floors inside and outside.
- 4. Name, registered trade name or registered trademark and contact address of the manufacturer as required pursuant to Article 11(5):*

TRUCCSA

C/ Budapest, parcela 42
Polígono Industrial Cabezo Beaza
CP 30353 Cartagena (Murcia)

truccsa@truccsa.com
- 5. Where applicable, name and contact address of the authorized representative whose mandate covers the task specified in Article 12(2):*

Not applicable
- 6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:*

System 3
- 7. In case of the declaration of performance concerning a construction product covered by a harmonized standard:*

UNE-EN 12004:2008.

Name and identification number of the notified body: APPLUS-LGAI Technological Center S.A., notified with the nº 0370.
Procedure for attesting: Initial type tests
Evaluation system: 3
Issued document: Essay report nº 11/3883-2767

GLOXER C1E PLASTER

8. *In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:*

Not applicable

9. *Declared performance:*

	Value	Regulation
Initial tensile adhesion strength	≥ 0,5 N/mm ²	UNE EN-1348 8.2
Tensile adhesion strength after water immersion	≥ 0,5 N/mm ²	UNE EN-1348 8.3
Tensile adhesion strength after heat ageing	≥ 0,5 N/mm ²	UNE EN-1348 8.4
Tensile adhesion strength after freeze thaw cycles	≥ 0,5 N/mm ²	UNE EN-1348 8.5
Open time (adherence 20 mins)	≥ 0,5 N/mm ²	UNE EN-1346
Initial tensile adhesion strength	≥ 0,5 N/mm ²	UNE EN-1346


Where pursuant to Article 37 or 38 the Specific Technical Documentation has been used, the requirements with which the product complies:

Not applicable

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

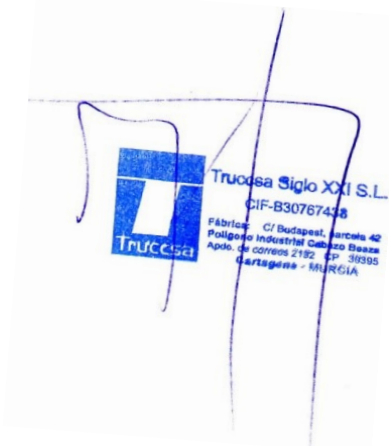

Truccsa Siglo XXI S.L.
 CIF-B30767438
 Fábrica: C/ Budapest, parcela 42
 Polígono Industrial Cabezo Beaza
 Apdo. de correos 2192 CP 30353
 Cartagena - MURCIA



Miguel Fernández Meca, Technical Director

Cartagena, March 04th, 2014

**Budapest , parcela 42 Polígono Industrial Cabezo Beaza Apdo. de correos 2192 CP 30353
 Cartagena (Murcia) SPAIN T 968 08 10 80 F 968 52 46 98 e-mail: truccsa@truccsa.com**

www.truccsa.com

