

## GLOXER COLOUR

### DECLARATION OF PERFORMANCE

In accordance with European Construction Product Regulation (RPC) nº 305/2011

#### Nº DdP ES-TJ006

1. *Unique identification code of the product-type:*

GLOXER COLOUR

2. *Type, batch or serial number or any element allowing identification of construction product as required pursuant to Article 11 (4):*

Grouting material for ceramic tiles, (UNE-en 13888 :2009). Check the name, batch and date of manufacture on the packaging.

3. *Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:*

Especially suitable for grouting joints in vertical and horizontal cladding ceramic tile, etc. medium and high porosity.

4. *Name, registered trade name or registered trademark and contact address of the manufacturer as required pursuant to Article 11(5):*

TRUCCSA

C/ Budapest, parcela 42  
Polígono Industrial Cabezo Beaza  
CP 30353 Cartagena (Murcia)

truccsa@truccsa.com

5. *Where applicable, name and contact address of the authorized representative whose mandate covers the task specified in Article 12(2):*

Not applicable

6. *System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:*

System 3

7. *In case of the declaration of performance concerning a construction product covered by a harmonized standard:*

UNE-EN 13888:2009

*Name and identification number of the notified body:* APPLUS-LGAI Technological Center S.A., notified with the nº 0370.

*Procedure for attesting:* Initial type tests

*Evaluation system:* 3

*Issued document:* Essay report nº 12/4838-592

**Budapest , parcela 42 Polígono Industrial Cabezo Beaza Apdo. de correos 2192 CP 30353  
Cartagena (Murcia) SPAIN T 968 08 10 80 F 968 52 46 98 e-mail: truccsa@truccsa.com**

**www.truccsa.com**

**GLOXER COLOUR**

8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:

Not applicable

9. Declared performance:

Classification according to UNE EN 13888	CG2 WA
Appearance	Coloured powder
Water mixing %	31 % ± 1 % (1,5 – 1,6 litres / bag 5 kg) (0,9 – 1 litre / bag 3 kg)
Powder bulk density	1,2 g/cm <sup>3</sup>
Paste bulk density	1,6 g/cm <sup>3</sup>
Abrasion resistance (UNE-EN 12808-2)	≤ 2000 mm <sup>3</sup>
Compressive resistance (UNE-EN 12808-3)	≥ 15 N/mm <sup>2</sup>
Flexural strength (UNE-EN 12808-3)	≥ 3,5 n/mm <sup>2</sup>
Determining Retraction (UNE-EN 12808-5)	≤ 2 mm/m <sup>2</sup>
Water absorption at 30 min (UNE-EN 12808-5)	≤ 2 g
Water absorption at 240 min (UNE-EN 12808-5)	≤ 5 g
Performance (kg/m <sup>2</sup> )*	0.3 – 0.4
Time of use of the paste **	Aprox. 60 min

\* Test carried out on 1 mm thickness and depending on the joint width

\*\* Tests performed in ambient conditions of temperature 23 ° C and 55% relative humidity


Where pursuant to Article 37 or 38 the Specific Technical Documentation has been used, the requirements with which the product complies:

Not applicable

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufactured identified in point 4.

Signed for and on behalf of the manufacturer by:

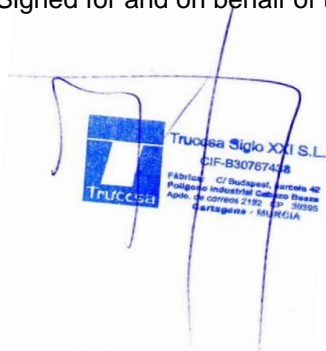

Truccsa Siglo XXI S.L.  
CIF-B30767438  
Fabrica: C/ Budapest, parcela 42  
Polígono Industrial Cabezo Beaza  
Avda. de correos 2192 CP 30353  
Cartagena - MURCIA



Miguel Fernández Meca, Technical Director

Cartagena, May 10th, 2014

Budapest , parcela 42 Polígono Industrial Cabezo Beaza Apdo. de correos 2192 CP 30353  
Cartagena (Murcia) SPAIN T 968 08 10 80 F 968 52 46 98 e-mail: truccsa@truccsa.com

[www.truccsa.com](http://www.truccsa.com)

