

LAVADO PLUS

DECLARATION OF PERFORMANCE

In accordance with European Construction Product Regulation (RPC) nº 305/2011

Nº DdP ES-TL0005

- 1. Unique identification code of the product-type:*

LAVADO PLUS
- 2. Type, batch or serial number or any element allowing identification of construction product as required pursuant to Article 11 (4):*

Onecoat cladding mortar type **OC - CS IV - W1**. Check the name, batch and date of manufacture on the packaging.
- 3. Intended use or uses of the construction product, in accordance with the applicable harmonized technical specification, as foreseen by the manufacturer:*

For waterproofing and decoration of facades and interiors. Sponge float finish or troweled finish.
- 4. Name, registered trade name or registered trademark and contact address of the manufacturer as required pursuant to Article 11(5):*

TRUCCSA

C/ Budapest, parcela 42
Polígono Industrial Cabezo Beaza
CP 30353 Cartagena (Murcia)

truccsa@truccsa.com
- 5. Where applicable, name and contact address of the authorized representative whose mandate covers the task specified in Article 12(2):*

Not applicable
- 6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V:*

System 3
- 7. In case of the declaration of performance concerning a construction product covered by a harmonized standard:*

UNE-EN 998-1:2003

Name and identification number of the notified body Centro de Estudios de Materiales y Control de Obra S.A. (CEMOSA) notified with the nº 1377.
Procedure for attesting: Initial type tests
Evaluation system: 3
Issued document: Essay report nº 1/2831/001/011

8. In case of the declaration of performance concerning a construction product for which a European Technical Assessment has been issued:

Not applicable

9. Declared performance:

	Value	Regulation
Reaction to fire	A1 (Incombustible)	UNE-EN 13501-1:2002
Adhesion	0,8 N/mm ² – FP:B	UNE-EN 1015-21:2003
Resistance to flexion	2,9 N/mm ²	UNE-EN 1015-11:2000
Resistance to compression	7,8 N/mm ²	UNE-EN 1015-11:2000
Capillary absorption coefficient	0,3 Kg/m ² *min ^{0.5}	UNE-EN 1015-18:2003
Permeabilidad al vapor de agua	μ 10,88	UNE-EN 1015-19:1999
Water permeability	0,5 ml/cm ²	UNE-EN 1015-21:2003
Dry Bulk density	1768 Kg/m ³	UNE-EN 1015-10:2000

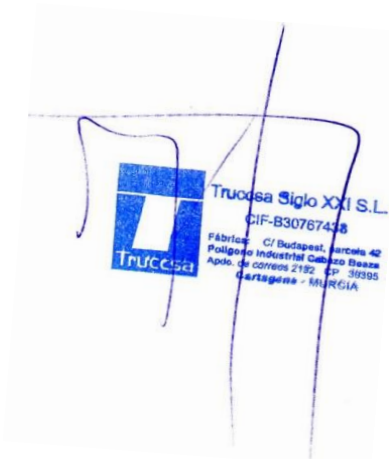
Where pursuant to Article 37 or 38 the Specific Technical Documentation has been used, the requirements with which the product complies:

Not applicable

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by:

Truccsa Siglo XXI S.L.
CIF-B30767438
Fábrica: C/ Budapest, parcela 42
Polígono Industrial Cabezo Beaza
Apdo. de correos 2192 CP 30353
Cartagena - MURCIA

Miguel Fernández Meca, Technical Director

Cartagena, March 04th, 2014

